

Delft #2 - With Offset Squares

My Delft #2 Quilt top uses 6 light / 12 medium / 6 dark fabrics - I added to the original set of 5 / 5 / 5 in the Delft "Gathering No Moss" kit

Here are the measurements for my second "Delft" Quilt.

#1) Centre Squares

35 centre squares cut : $5\frac{1}{2}'' \times 5\frac{1}{2}''$

I cut 3 from each of 12 fabrics - one extra; I recommend using "medium" fabrics (and any others you may have) for the centre squares;

#2) Inner Triangles

35 x 2 rectangles for inner triangles cut: $7\frac{1}{2}'' \times 2\frac{1}{4}''$



When cut you'll have a set of 4 triangles - they're going to be a bit long but easier to sew and trim

18 of the rectangle pairs are dark / 17 are light

To cut the triangles - I laid my ruler on diagonal of the rectangle then offset it $1\frac{3}{8}''$ on the narrow ends (see photo)

18 sets of 4 triangles (the dark ones) cut on one diagonal / 17 sets of 4 triangles (the light ones) cut on opposite diagonal

Below are the 35 centre squares with inner triangles laid on top (90° angle on bottom - light triangles going one way; dark triangles going the other):



Sew inner triangles to centre square, (see photos and comments below) press - trim these partial blocks to 7";

#3) Outer Triangles

You need 35 x 2 rectangles for outer triangles cut: 8 3/4" x 2 1/4"

Be careful here - 17 sets of 4 (dark fabric) cut on same diagonal as contrasting fabric inner triangles, 18 sets of 4 (light fabric) cut on opposite diagonal);

In other words, where I had light inner triangles, I used a dark outer triangle / where there was a dark, I added a light

The outer triangles are added in the same way as you apply the inner triangles (see photos below)

After adding the outer triangles, press and trim the finished blocks to 8 1/4"


#4) Sashing

Cut 82 sashing pieces 1 3/4" x 8 1/4"; (17 WOF fabric 1 3/4" strips)

#5) Sashing Corners

Cut 48 corners 1 3/4" x 1 3/4" (2 WOF 1 3/4" strips).

Adding Triangles To Centre Block

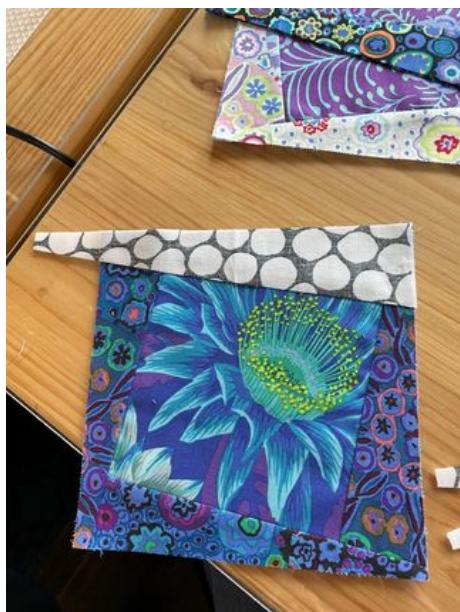

Attaching first triangle - align 90° with corner of centre square - sew from centre of side to 90° corner - this is a partial seam construction technique. This block already has dark inner triangles, I'm adding the light outer triangles - the 90° are in the same direction. Adding the inner triangles is the same process



Add sides, 2,3,4 then finish seam 1. Press and trim



This block (adding dark triangles to inner light triangles) is offset in the opposite direction - make sure you align the 90° angles - they will be in the opposite corner from the previous blocks - sew first partial seam from 90° corner half way. Here you're sewing from wide to narrow.

There will also be border fabric added - I just don't know what yet, likely a narrow inner border, with another narrow contrasting border, finished with a wider outer border - all of that depends on the finished size of the completed panel.



35 finished blocks laid out. Sashing to come